




S Y S T E M

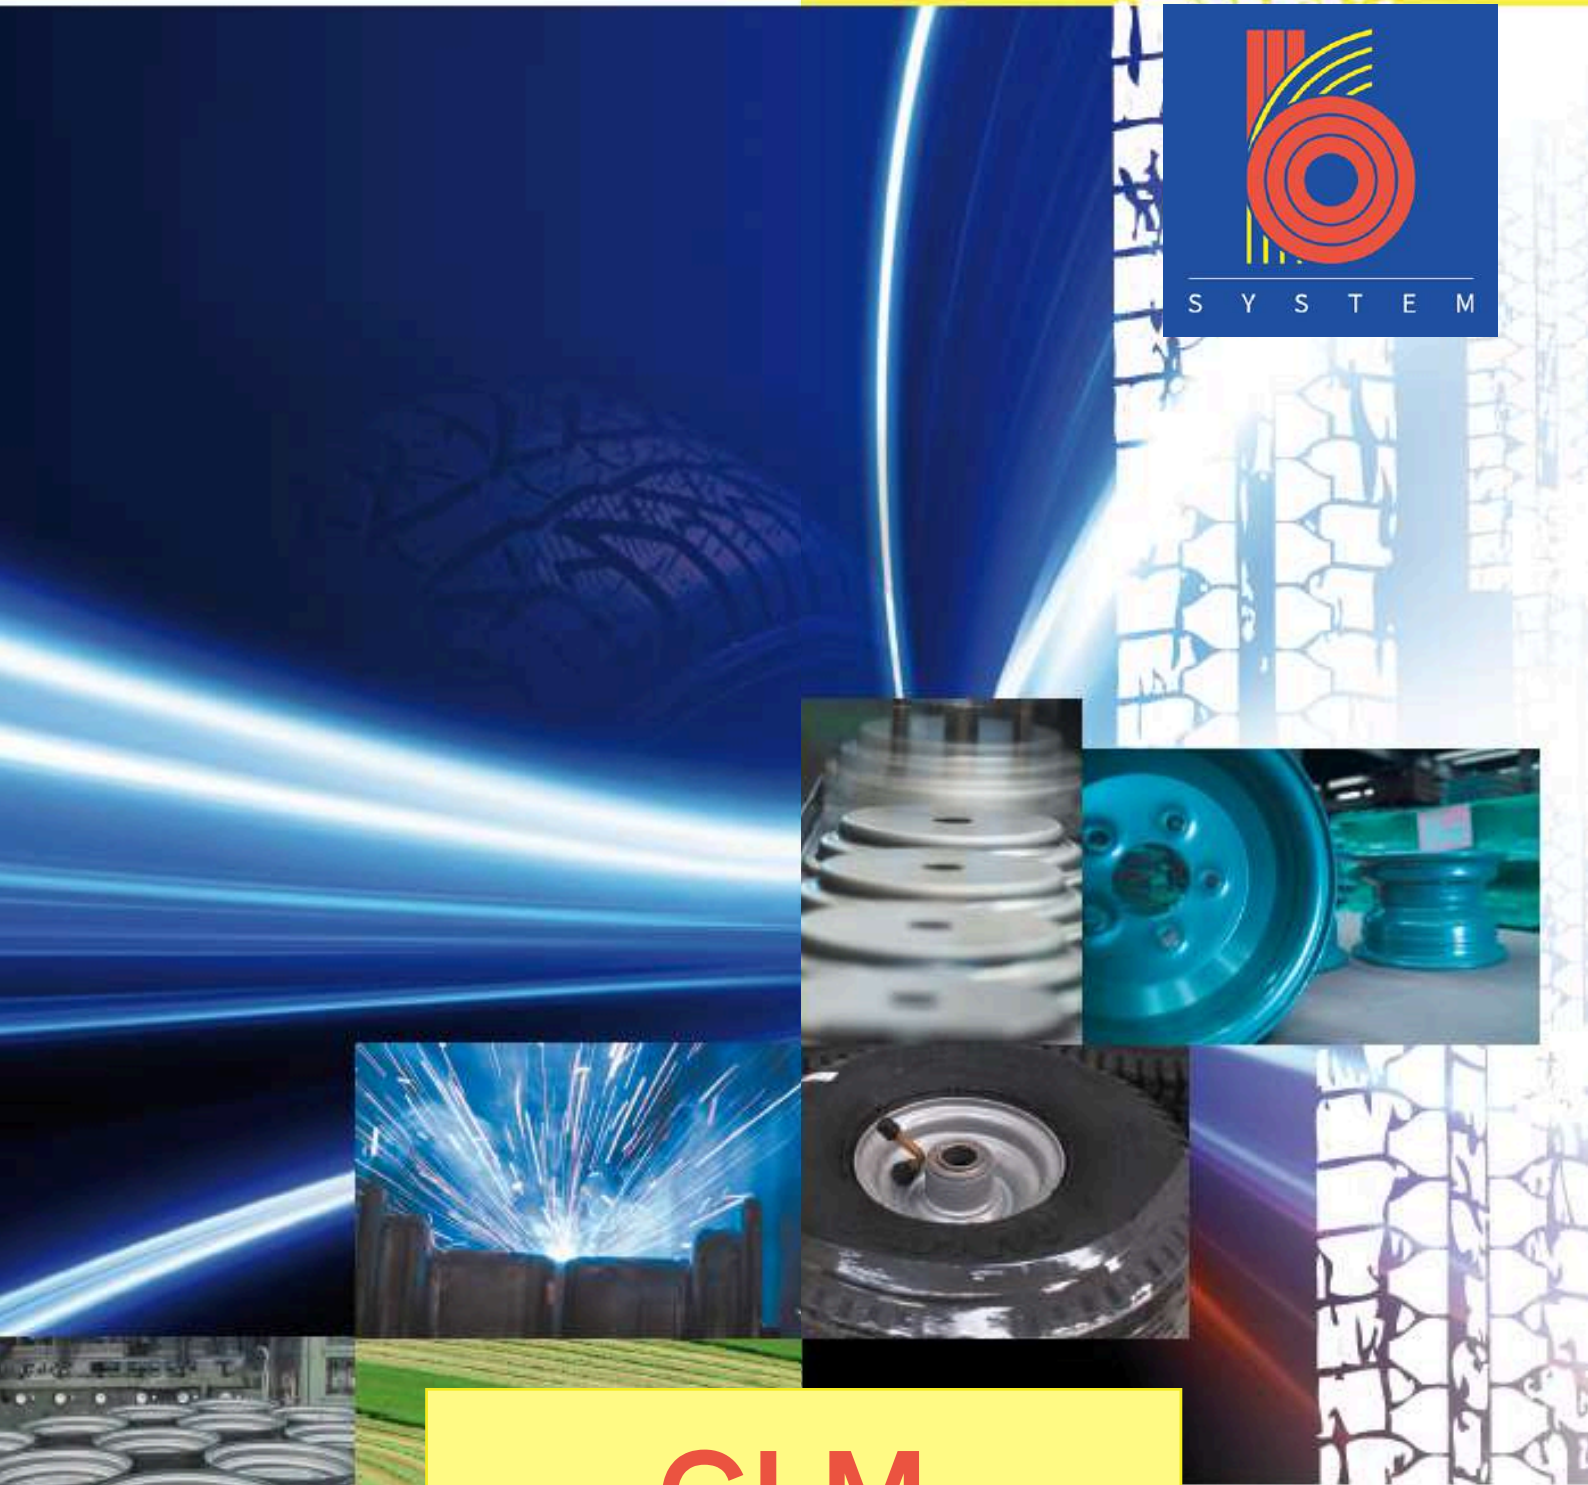

**CLM**  
*Italruote*

GENERAL CATALOGUE

# SUMMARY

LIGHT TRANSPORTATION	4
GARDEN TRACTORS	6
AGRICULTURAL IMPLEMENTS	10
TRAILERS AND CARAVANS	12
HANDLING AND MOBILE HOME	16
CUSTOMIZED WHEELS	18

**CLM**  
*italruote*



C.L.M. S.r.L.

Sede Operativa:  
Via Zona Industriale, 26  
33049 San Pietro Al Natisone UD

Sede Legale:  
Via A.M. Ceriani n.96  
21040 - Uboldo (VA)

C.F./P.IVA: 05611580720  
PEC: clmitalruote@legalmail.it



# CLM

The company is located in Friuli in the extreme North-East of Italy and mainly produces **wheels** and **rims** for agricultural and industrial vehicles.



**28.000 m<sup>2</sup>** Total area  
**10.150 m<sup>2</sup>** Covered area  
About **100.000 discs** produced in a month



# SUCCESS IS MEASURED BY TIME

The birth of CLM traces back to the mid-1950s with **Giovanni Radrizzani** and **Antonia** with the production of **rims and wheels**, ranging from **4" to 10"** in a small workshop at Piazza Repubblica in the center of Uboldo. Since then, the production of these rims has been ongoing.

With the move to the current headquarters in Uboldo, and the start of axle production, the production of rims and wheels also moved along with the transfer. The availability of space facilitated an increasingly rapid development of rims and wheels production.

1954

1987

By the mid-1980s, the European market for small wheels underwent a revolution, with the introduction of low-cost tyres from China and other Asian countries. This change laid the groundwork for the partnership between **Giovanni Radrizzani** and **SOCAH**, one of the leading tyre importers in the European market. The collaboration between the two companies generated a rapid acceleration of Radrizzani's turnover and **disc production**, pushing him to invest in a new warehouse, that being **Italruote**. This allowed the production of discs to be separated from that of axles, facilitating increasingly rapid growth for Italruote.



The need for more space for both the production of rims and axles, combined with the lack of warehouses in the area, led the managers of ADR to transfer production to **San Pietro al Natisone**, where it was possible to purchase a warehouse with adjoining building land. At the same time of this transfer, the company took the name of CLM, but maintaining the Italruote brand, which was now known throughout the world.

1996

2000

At the beginning of the twentieth century, thanks to the availability of **larger spaces**, production increased significantly with the introduction of fully automated lines. In addition to the manufacturing of discs, the ability to offer **complete wheels with tires** was added, ensuring extensive stock availability to meet diverse needs. The assemblies, carried out entirely automatically, ensure maximum efficiency and quality.

## PRESENT AND FUTURE

The availability of building space allowed us to build a new warehouse and make further progress towards, improving our customer service. We can now carry out tyre fitting, offering customers **complete wheels with tyres**. In the new hall, we have established a warehouse for tyre storage, a central area equipped with fully automatic tyre assembly lines and dimensional control lines. There is also a separate area for storing and shipping complete wheels. This allows us to offer a complete service to our customers.



**CLM**  
*italruote*

# LIGHT TRASPORTATION



Designed to offer optimal performance and reliability in a **wide range of applications**, our products are the ideal choice for those seeking efficient and high-quality solutions for light transportation.




Whether you need to equip carts, wheelbarrows, gardening equipment, or other lightweight apparatus, you will surely find the perfect solution in our selection.


The quality and reliability of our wheels and rims ensure safe and efficient transportation in every situation.

# LIGHT TRANSPORTATION

## BALL BEARINGS

IMAGE	RIMS	DIMENSIONS		CAPACITY Kg	MAX LOAD		CODE Nr.
		(mm)	(mm)		10 km/h	25 km/h	
		D	L				
	2.50Cx4	20	60	210	185	V-005210	
	2.50Cx4	20	80	210	185	V-005310	
	2.50Ax6	20	80	200	140	V-032102	
	2.50Ax6	25	74	200	140	V-031210	
	2.50Bx6	20	70	200	140	V-061110	
	2.50Bx6	25	65	200	140	V-026210	
	2.50Ax8	25	65	250	180	V-408310	
	2.50Bx6	25	51,5	200	140	V-031210	
	2.50Ax8	20	90	250	180	V-412310	
	2.50Ax8	25	100	250	180	V-408212	

## NYLON PLAIN BEARING

IMAGE	RIMS	DIMENSIONS		CAPACITY Kg	MAX LOAD		CODE Nr.
		(mm)	(mm)		10 km/h	25 km/h	
		D	L				
	2.50Cx4	20	80	200	140	V-001110	
	2.50Cx4	20	60	200	140	V-001310	
	2.50Cx4	25	80	200	140	V-002110	
	2.50Bx6	20	80	200	140	V-044111	
	2.50Bx6	25	80	200	140	V-030111	
	2.50Ax8	20	100	200	140	V-404111	
	2.50Ax8	25	100	200	140	V-403111	
	2.50Ax8	30	100	200	140	V-402111	

## ROLLER CAGE



IMAGE	RIMS	DIMENSIONS		CAPACITY Kg	MAX LOAD		CODE Nr.
		(mm)	(mm)		10 km/h	25 km/h	
		D	L				
	2.50Cx4	20	63	200	140	V-003110	
	2.50Cx4	20	75	200	140	V-003210	
	2.50Cx4	25	60	200	140	V-004110	
	2.50Ax8	20	100	200	140	V-405111	
	2.50Ax8	25	100	200	140	V-406111	

IMAGE	RIMS	RECOMMENDED TYRE
	2.50Cx4	3.00x4" - 11.4.00x4"
	2.50Bx6	3.50x6" - 4.00x6"
	2.50Ax8	3.50x8" - 4.80/4.00x8"

# GARDEN TRACTORS




Rims and wheels characterized by superior quality and attention to design. Each wheel kit is carefully designed to perfectly fit the specific needs of the tractor, ensuring optimal performance.

We offer complete solutions for **compact tractors** and dual wheels, and we also boast innovative solutions for **orchard tractors**, **mountain tractors**, and **single-wheel tractors**.




# GARDEN TRACTORS

## BALL BEARINGS

IMAGE	RIMS	DIMENSIONS		CAPACITY Kg	MAX LOAD		CODE Nr.
		(mm)	(mm)		10 km/h	25 km/h	
		D	L				
	2.50Cx4	20	60	210	185	V-005202	
	2.50Cx4	20	75	210	185	V-005400	
	2.50Bx6	20	70	200	140	V-061110	
	3.25Ax6	25	51,5	325	260	V-128112	
	3.25Ax6	25	65	325	260	V-128217	
	3.50Ax6 (offset)	25	51,5	250	200	V-141210	
	4.50Ax6	25	90	325	260	V-151811	
	4.50Ax6	25	180	325	260	V-151D01	
	2.50Ax8	25	65	350	300	V-408310	
	2.50Ax8	25	100	350	300	V-408212	
	5.50Ax8	25	100	280	280	V-557013	
	5.50Ax8	25	150	280	280	V-557M01	
	7.00Bx8	30	200	380	380	V-588401	
	3.50Bx10	25	100	370	350	V-650201	

## NYLON PLAIN BEARING

IMAGE	RIMS	DIMENSIONS		CAPACITY Kg	MAX LOAD		CODE Nr.
		(mm)	(mm)		10 km/h	25 km/h	
		D	L				
	2.50Cx4	16	82	200	140	V-016111	
	2.50Cx4	20	60	200	140	V-001311	
	2.50Bx6	20	80	200	140	V-044111	
	2.50Bx6	25	80	200	140	V-030111	
	3.25Ax6	20	80	220	160	V-129111	
	3.50Ax6 (offset)	20	55	220	160	V-146111	
	4.50Ax6	20	75	220	160	V-157511	
	4.50Ax6	20	100	220	160	V-157111	
	4.50Ax6	20	110	220	160	V-177151	

## ROLLER CAGE

IMAGE	RIMS	DIMENSIONS		CAPACITY Kg	MAX LOAD		CODE Nr.
		(mm)	(mm)		10 km/h	25 km/h	
		D	L				
	2.50Cx4	20	75,5	200	140	V-003201	
	2.50Cx4	25,4	63	200	140	V-009102	
	2.50Bx6	20	75	200	140	V-057110	
	3.25Ax6	20	75	220	160	V-138111	
	3.25Ax6	25	100	220	160	V-130101	
	4.50Ax6	25	65	250	200	V-182202	
	4.50Ax6	25	183	250	200	V-182101	

# GARDEN TRACTORS

## BALL BEARINGS

IMAGE	RIMS	DIMENSIONS		CAPACITY Kg	MAX LOAD		CODE Nr.
		(mm)	(mm)		10 km/h	25 km/h	
		D	L				
	2.50Bx6	25	65	200	140	V-026212	
	3.25Ax6	25	80	325	260	V-128313	
	3.50Ax6 (offset)	25	65	250	200	V-141112	
	4.50Ax6	25	100	325	260	V-151718	
	5.50Ax8	25	100	280	280	V-557411	
	7.00Bx8	25	73	380	380	V-578311	
	7.00Bx8	25	90	380	380	V-578401	

## TUBO CHIAVETTA



IMAGE	RIMS	DIMENSIONS		CAPACITY Kg	MAX LOAD		CODE Nr.
		(mm)	(mm)		10 km/h	25 km/h	
		D	L				
	2.50Cx4	19,1	72	200	140	V-006110	
	3.25Ax6	19,1	80	200	140	V-129210	
	4.50Ax6	19,1	87	250	200	V-179100	
	7.00/300x8	19,1	75.2	280	280	V-487100	
	5.50Ax8	19,1	90	280	280	V-555100	
	5.50Ax8	25,4	80	280	280	V-562100	
	7.00Bx8 (offset)	19,1	89	380	380	V-586200	
	7.00Bx8	19,1	106	380	380	V-587100	
	7.00Bx8	20	80	380	380	V-582100	
6.00x10	19	106	380	380	V-887100		

IMAGE	RIMS	RECOMMENDED TYRE
	2.50Cx4	3.00x4" - 11.4.00x4"
	2.50Bx6	3.50x6" - 4.00x6"
	3.25Ax6	13.5.00x6"
	3.50Ax6	13.5.00x6" - 15.6.00x6"
	4.50Ax6	15.6.00x6" - 13.6.50x6"
	2.50Ax8	3.50x8" - 4.80/4.00x8"
	5.50Ax8	16.6.50x8" - 16.7.50x8"
	7.00Bx8	18.8.50x8" - 18.9.50x8"
	3.50Bx10	145/80x10"



# AGRICULTURAL IMPLEMENTS



In this range, we present a wide selection of wheels and rims designed to meet the specific needs of these crucial operations.

We understand that every agricultural operation is unique, so we offer a range of wheels and rims with **different sizes, profiles, and features** to suit the specific needs of your land and machinery.

From width to load capacity, you can customize your choices to achieve optimal performance.




# AGRICULTURAL IMPLEMENTS

## BALL BEARINGS

IMAGE	RIMS	DIMENSIONS		CAPACITY Kg	MAX LOAD		CODE Nr.
		(mm)	(mm)		10 km/h	25 km/h	
		D	L				
	2.50Cx4	20	60	185	135	V-005210	
	2.50Cx4	20	80	185	135	V-005310	
	2.50Bx6	25	51,5	135	110	V-026112	
	2.50Ax6	20	80	135	110	V-032102	
	2.50Ax6	25	51,5	135	110	V-031112	
	3.25Ax6	25	51,5	325	260	V-128103	
	3.25Ax6	25	90	325	260	V-128410	
	3.50Ax6	25	51,5	250	200	V-141210	
	3.50Ax6	25	51,5	250	200	V-141210	
	3.50Ax6	25	65	250	200	V-141103	
	4.50Ax6	25	51,5	325	260	V-151400	
	2.50Ax8	25	92	350	300	V-420301	
	2.50Ax8	25	100	350	300	V-408212	
	5.50Ax8	25	51,5	280	280	V-557G14	
5.50Ax8 *	25	150	280	280	V-557M01		

## BALL BEARINGS

IMAGE	RIMS	DIMENSIONS		CAPACITY Kg	MAX LOAD		CODE Nr.
		(mm)	(mm)		10 km/h	25 km/h	
		D	L				
	2.50X6	25	65	135	110	V-026212	
	4.50Ax6	25	65	325	260	V-151312	
	4.50Ax6	25	73	325	260	V-164218	
	4.50Ax6	25	90	325	260	V-164118	
	5.50Ax8	25	65	280	280	V-557341	
	5.50Ax8	25	73	280	280	V-557B02	
	5.50Ax8	25	100	280	280	V-557401	
	7.00Bx8	25	73	380	380	V-57880E	
	7.00Bx8	25	90	380	380	V-578401	
	7.00Bx8	30	127	380	380	V-588501	
	7.00Bx8	30	102	380	380	V-579291	
	8.50x12	40	97	610	610	V-900110	

IMAGE	RIMS	RECOMMENDED TYRE
	2.50Cx4	3.00x4" - 11.4.00x4"
	2.50Bx6	3.50x6" - 4.00x6"
	3.25Ax6	13.5.00x6"
	3.50Ax6	13.5.00x6" - 15.6.00x6"
	4.50Ax6	15.6.00x6" - 13.6.50x6"
	2.50Ax8	3.50x8" - 4.80/4.00x8"
	5.50Ax8	16.6.50x8" - 16.7.50x8"
	7.00Bx8	18x6.50x8" - 18.8.50x8" - 18.9.50x8" - 20x10.00x8"
	8.50x12	23x10.50 - 12

# TRAILERS AND CARAVANS

We present a wide range of wheels and rims specifically designed for trailers and caravans, offering safety, comfort, and style on every journey.






Our wheels and rims are designed to ensure a smooth and comfortable ride on the road.

With high-quality materials and ergonomic design, they offer stable driving and precise maneuverability, allowing you to tackle every turn and every route with confidence and safety.



# TRAILERS AND CARAVANS

## HUB CONNECTION

IMAGE	RIMS	DIMENSIONS		CAPACITY Kg	MAX LOAD		CODE Nr.
		(mm)	(mm)		90 km/h	110 km/h	
		D	Di x N° x D				
	2.50Ax8	58	98x4x14	300	270	V-201010	
	2.50Ax8	62	95x4x14	300	250	V-202010	
	2.50Ax8	85	115x4x12,5	300	250	V-203011	
	2.50Ax8	60	100x4x15	300	250	V-207010	
	2.50Ax8	66,7	101,6x4x11,5	300	250	V-213010	
	2.50x8	50	75X4X11	300	250	V-2170W0	
	2.50x8	74,5	94X4X11	300	250	V-218010	
	5.50Ax8	62	95x4x14	370	350	V-550010	
	5.50Ax8	58	98x4x14	370	350	V-551010	
	5.50Ax8	85	115x4x12,5	370	350	V-552010	
	5.50Ax8	60	100x4x15	370	350	V-553010	
	5.50Ax8	66,7	101,6x4x11,5	370	350	V-558010	
	7.00Bx8	58	98x4x14	370	350	V-576010	
	7.00Bx8	85	115x4x12,5	370	350	V-577010	
	7.00Bx8	60	100x4x15	370	350	V-581010	
	7.00Bx8	66,7	101,6x4x11,5	370	350	V-584010	
	7.00Bx8	62	95x4x14	370	350	V-930010	
	7.25x8	58	98x4x14	370	350	V-902010	
	7.25x8	62	95x4x14	370	350	V-903010	
	7.25x8	60	100x4x15	370	350	V-904010	
	9.00Ix8	60	100x4x15	370	350	V-593010	
	9.00Ix8	66,7	101,6x4x11,5	370	350	V-594010	
	3.00Bx10	58	98x4x14	320	300	V-601010	
	3.00Bx10	62	95x4x14	320	300	V-602010	
	3.00Bx10	85	115x4x12,5	320	300	V-603010	
	3.00Bx10	60	100x4x15	320	300	V-604010	
	3.00Bx10	140,5	175x6x12,5	320	300	V-609010	
	3.00Bx10	58	98x4x14	320	300	V-610010	
	3.00Bx10	66,7	101,6x4x11,5	320	300	V-611010	
	3.50Bx10	58	98x4x14	345	400	V-626010	
	3.50Bx10	62	95x4x14	345	400	V-627010	
	3.50Bx10	85	115x4x12,5	345	400	V-628010	
	3.50Bx10	60	100x4x15	345	400	V-629010	
	3.50Bx10	96	140x4x14,5	370	400	V-642010	
	3.50Bx10	85	130x4x18	370	400	V-643010	
	3.50Bx10	66,7	101,6x4x11,5	345	400	V-658010	

# TRAILERS AND CARAVANS



HUB CONNECTION						
IMAGE	RIMS	DIMENSIONS	DIMENSIONS	CAPACITY	MAX LOAD	CODE
		(mm)	(mm)	Kg		
		D	Di x N° x D	90 km/h	110 km/h	Nr.
	4.50Bx10	58	98x4x14	345	325	V-676010
	4.50Bx10	60	100x4x15	345	325	V-678010
	4.50Bx10	85	115x4x12,5	345	325	V-679010
	6.00Ix10	60	100x4x15	345	325	V-801010
	6.00Ix10	66,7	101,6x4x11,5	345	325	V-802010
	6.00Ix10	66,7	101,6x4x11,5	345	325	V-802011
	6.00Ix10	58	98x4x14	345	325	V-803010
	6.00Ix10	67	112x5x16	770	750	V-810010
	6.00Ix10	58,5	98x4x15	770	750	V-811000
	6.00Ix10	94	140x5x18,5	770	750	V-812010
	6.00Ix10	60	100x4x15	770	750	V-813000
	6.00Ix10	68,7	101,6x4x15	770	750	V-814000

IMAGE	RIMS	RECOMMENDED TYRE
	2.50Ax8	3.50x8" - 4.80/4.00x8"
	5.50Ax8	16.6.50x8" - 16.7.50x8"
	7.00Bx8	18.8.50x8" - 18.9.50x8"
	9.00Ix8	20.-8.00x8" - 20.10.00x8"
	3.00Bx10	4.50x10" - 5.00x10"
	3.50Bx10	145/80x10"
	4.50Bx10	165x10" - 175x10"
	6.00Ix10	195/50x10" - 20.5x8.0x10"
	6.00Ix10	195/50x10" - 20.5x8.0x10"



# HANDLING AND MOBILE HOME



We provide highly adaptable and versatile wheels and rims, given the variety of transport vehicles and loads that need to be managed in airport environments.



Our rims and wheels accommodate various types of vehicles and loads, ensuring **smooth and safe** handling in every situation. We guarantee absolute safety in handling operations. We offer **stability and control** during loading and unloading maneuvers, reducing risks and damage to personnel, cargo, or vehicles.




We offer tyres, wheels and rims for mobile homes to ensure stable and **safe driving**, supporting the vehicle's structure weight and maintaining proper balance during travel.

Considering the long road trips of mobile homes, our products are **durable** and capable of withstanding continuous stress. The materials used in the rims and wheels are of high quality with **robust construction** to ensure their longevity and safety.



# HANDLING AND MOBILE HOME

BALL BEARINGS							
IMAGE	RIMS	DIMENSIONS		CAPACITY Kg	MAX LOAD		CODE Nr.
		(mm)			25 km/h	40 km/h	
		D	L				
	4.50x8	35	78	1000	600	Z-107201	
	4.50x8	30	92	1000	600	Z-107108	
	3.00Dx8	30	78	1300	900	V-480111	
	3.00Dx8	35	78	1700	1300	V-480201	
	4.00Ex9	30	78	2100	1400	V-595101	
	4.00Ex9	35	78	2750	2100	V-595201	
	4.00Ex9	35	78	2750	2100	V-596101	
	4.00Ex9	35	68	2750	2100	V-597101	
	4.00Ex9	35	66	2750	2100	V-597201	

HUB CONNECTION							
IMAGE	RIMS	DIMENSIONS		CAPACITY (mm)	MAX LOAD		CODE Nr.
		(mm)			10 km/h	10 km/h	
		D	Di x N° x D				
	4.00x9	94,5	140x5x18,5	3000	3000	Z-006015	



HUB CONNECTION							
IMAGE	RIMS	DIMENSIONS		CAPACITY (mm)	MAX LOAD		CODE Nr.
		(mm)			25 km/h	25 km/h	
		D	Di x N° x D				
	4.50x8	62	95x4x14,5	1000	1000	Z-102016	
	4.50x8	94,5	140x5x18,5	1000	1000	Z-105006	
	3.00Dx8	62	95x4x14,5	1700	1700	Z-001006	
	3.00Dx8	94,5	140x5x18,5	1700	1700	Z-002004	
	3.00Dx8	58	98X4X14	1700	1700	Z-003016	
	3.00Dx8	94	140X5X18,5	1700	1700	Z-002005	
	3.00Dx8	60,5	100X4X14	1700	1700	Z-005001	

IMAGE	RIMS	RECOMMENDED TYRE
	3.00Dx8	5.00x8"
	3.00Dx8	5.00x8" IND
	4.50x8"	16x6x8"
	4.00Ex9	6.00x9"





# CUSTOMIZED WHEELS

We offer tailor-made solutions for the specific needs of each sector. We answer promptly to even the most unique requests with innovative ideas and customized solutions.

Our rims and wheels are designed to provide greater maneuverability and ease of movement in confined spaces, thanks to compact size and smaller wheels.





# CUSTOMIZED WHEELS

TYRES						
IMAGE	TYRE D	TYRE SIZE DxL	BAR D	PR Nr.	CAPACITY Kg	RIM
	13x5.00-6"	327x120	2,7	4	200	3.50 X 6
	15x6.00-6"	367x164	2,1	6	322	4.50 X 6
	16x6.50-8"	410x165	2,5	10	370	5.50 X 8
	16x6.50-8"	410x165	4,5	24	450	5.50 X 8
	18x8.5-8"	460x215	1,8	6	470	7.00 X 8
	18x9.5-8"	465x235	2,0	6	520	7.00 X 8
	20x10.00-8"	500x240	1,5	4	530	
	4.80/4.00-8"	410x120	4,25	4	300	2.50 X 8
	5.00-8"	467x151	5,0	6	410	2.50X 8
	16.5x6.5-8"	420x170	5,0	6	400	5.50 X 8
	18.5x8.5-8"	475x225	3,5	6	470	7.00 X 8
	4.00-10"	470x115	3,5	6	360	3.00X 10
	4.5-10"	490x126	3,0	6	390	3.50 X 10
	5.00-10"	515x139	3,5	6	440	3.50 X 10
	145-10"	490x140	3,5	6	400	3.50 X 10
	195/50-10"	455x187	6,0	8	750	6.00 X 10
	205/65-10"	522x211	4,9	8	750	6.00 X 10
	5.00-8"	465x145	7,0	8	950	3.00 X 8
	5.00-8"	465x145	7,5	12	1300	3.00 X 8
	6.00-9"	530x160	7,0	10	1200	4.00X 9
	6.00-9"	530x160	7,5	12	1600	4.00 X 9
	6.00-9"	530x160	8,0	16	2200	4.00 X 9
	6.00-9"	530x160	8,5	22	2750	4.00 X 9
	3.50-6"	330x95	1,7	4	200	2.50 X 6
	13x5.00-6"	320x120	1,4	4	200	3.50 X 6
	350-8"	390x90	1,7	4	250	2.50 X 8
	4.00-8"	420x110	1,7	4	300	2.50 X 8
	16x6.50-8"	420x170	1,3	4	280	5.50 X 8
	18x9.50-8"	470x225	1,7	4	400	7.00 X 8
	4.50-10"	505x125	1,7	4	300	3.50 X 10
	5.00-10"	520x135	1,7	4	350	3.50 X 10
	20x8.00-10"	520x196	1,7	4	400	6.00 X 10

# CUSTOMIZED WHEELS


## TYRES

IMAGE	TYRE	TYRE SIZE	BAR	PR	CAPACITY	RIM
	D	DxL	D	Nr.	Kg	
	4.10x3.5-4"	265x90	2,1	4	200	2.50 X 4
	11x4.00-4"	275x105	1,7	4	175	2.50X 4
	13x5.00-6"	330x120	2,75	4	220	3.50 X 6
	15x6.00-6"	360x160	2,0	4	300	4.50 X 6
	16x6.50-8"	410x165	2,0	4	400	5.50 X 8
	16x6.50-8"	410x165	2.0	6	400	5.50 X 8
	16x6.50-8"	410x165	2.0	10	450	5.50 X 8
	16x6.50-8"	410x165	2.0	24	500	5.50 X 8
	18x6.50-8"	455x165	2,0	4	400	5.50 X 8
	18x6.50-8"	455x165	1.7	6	350	5.50 X 8
	18x8.50-8"	460x215	1.5	4	400	7.00 X 8
	18x8.50-8"	460x215	1.5	6	400	7.00 X 8
	18x9.50-8"	465x235	1.7	4	500	7.00 X 8
	18x9.50-8"	465x235	1.5	6	600	7.00 X 8
	20x10.00-8"	510x250	1,5	4	506	9.00 X 8
	20x10.00-10"	510x250	1,5	4	513	9.00X 10
	20x8.00-10"	506x198	1,7	4	407	6.00X 10
	20x10.00-10"	513x255	0,7	2	335	9.00 X 10
	20x10.00-10"	513x250	1,5	4	530	9.00 X 10
23x10.50-12"	580x265	1.5	4	650	8.50 X 12	


	16x6.50-8"	410x165	2.0	4	300	5.50/8
	16x6.50-8"	410x165	2.0	6	400	5.50/8
	16x7.50-8"	418x178	2.0	4	350	5.50/8
	16x7.50-8"	418x178	2.0	8	470	5.50/8
	18x6.50-8"	455x165	1.7	4	350	5.50/8
	18x7.50-8"	457x191	1.7	4	400	5.50/8
	18x8.50-8"	460x215	1.5	4	400	7.00/8
	18x8.50-8"	460x215	1.5	6	500	7.00/8
	18x9.50-8"	465x235	1.5	4	500	7.00/8
	18x9.50-8"	465x235	1.5	6	600	7.00/8
	20x8.00-8"	495x230	1.5	4	450	7.00/8
	20x10.00-8"	510x250	1.5	4	550	9.00/8
	20x10.00-8"	510x250	1.5	6	700	9.00/8
	20x8.00-10"	510x205	1.7	4	450	6.00/10
	20x10.00-10"	515x260	1.5	4	550	9.00/10
	23x10.50-12"	580x265	1.4	4	650	8.50/12
	23x10.50-12"	580x265	1.5	6	800	8.50/12
	26x12.00-12"	650x310	1.4	4	820	10.50/12
	26x12.00-12"	650x310	2.0	6	1215	10.50/12

# CUSTOMIZED WHEELS

## TYRES

IMAGE	TYRE	TYRE SIZE	BAR	PR	CAPACITY	RIM
	D	DxL	D	Nr.	Kg	
	16.5x6.5-8"	415x165	2.0	6	380	5.50/8
	18.5x8.5-8"	465x215	2.0	6	450	7.00/8
	18.5x8.5-8"	465x215	1.7	12	600	7.00/8
	195/50-10"	455x187	5.5	8	750	6.00/10
	195/55R10"	468x205	5.5	R	750	6.00/10
	205/50-10"	466x203	2.2	12	900	6.00/10
	205/65-10"	522x209	7.2	12	800	6.00/10
	255/50-10"	525x255	5.8	8	800	8.00/10
	20.5x8.0-10"	520x205	3.4	6	550	7.00/10
	20.5x8.0-10"	520x205	4.8	8	630	7.00/10
	20.5x8.0-10"	520x205	6.0	10	700	7.00/10
	20.5x8.0-10"	520x205	7.2	12	800	7.00/10

## HOLES

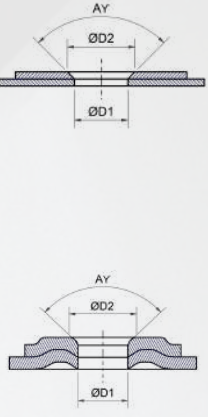IMAGE	CENTRAL HOLE	BOLT CIRCLE	STUDHOLE	HOLES	CONICAL
	Ø mm	mm	Ø D1 mm	Nr.	A°
	62,5	95	14	4	90
	94	140	18,5	5	R14
	67	112	16	5	60
	58.5	98	14	4	90
	85	115	12,5	4	90
	60	100	15	4	60
	66,7	101,6	11,5	4	90
	58	98	14	4	60
	62,5	95	14	4	90
	85,5	115	12,5	4	90
	85	115	12,5	4	90
	85	130	18	4	90
	85	115	12,5	4	90
	85	115	12,5	4	60
	66,7	101,6	13,5	4	90
	96	140	14	4	60
	66,7	101,6	11,5	4	60
	58	98	14	4	90
	68,7	101,6	15	4	90
	68,7	101,6	11,5	4	R10
67	112	18,5	5	R14	

# AMONG OUR CUSTOMERS

**CLAAS**

**KRONE**

**CNH**  
INDUSTRIAL

**STIGA**

**AL-KO**

**PÖTTINGER**

QUALITY FOR LIFE

**Kverneland**

**Edit: October 2024**



S Y S T E M

C.L.M. S.r.L.

Sede Operativa: Via Zona Industriale, 26  
33049 San Pietro Al Natisone UD

Sede Legale: Via A.M. Ceriani n.96  
21040 - Uboldo (VA)

C.F./P.IVA: 05611580720

PEC: [clmitalruote@legalmail.it](mailto:clmitalruote@legalmail.it)



Zona industriale, 26  
33049 S. Pietro al Natisone (UD)



Moving Innovation

**ADR** Group



**A.D.R. S.p.A.**  
Via Ceriani n.96  
21040 Uboldo (VA)  
+39 02 961711 - info@adraxles.com  
www.adraxles.com



**SAE - SMB Industries**  
Route de Cliron  
08090 Ham Les Moines - France  
+33(0)324595454 - contact@sae-smb.fr  
www.sae-smb.com



**Colaert Essieux**  
11 Bis Route Nationale BP2  
59189 Steenbecque - France  
+33 (0)3 28438550 - commercial@colaertessieux.fr  
www.colaertessieux.fr



**C.L.M. S.r.L.**  
Via Zona Industriale, 26  
33049 San Pietro Al Natisone UD  
+39 0432 727851 - sales@adraxles.com  
www.clmwheels.com



[www.adraxles.com](http://www.adraxles.com)

The Axle Company since 1954